



PORTABLE
VIDEO
SYSTEMS

EXTENSION POLES

Zistos Extension Poles are rugged, lightweight and portable. Each pole is specifically optimized for its intended application.

Features and Benefits:

- Designed for maximum extended length yet portability when retracted
- Extremely rugged yet lightweight
- 1-foot flexible gooseneck to set camera orientation, except RW & RW-8
- Compatible with all Zistos cameras and displays through *VisionFlex™*
- Quick disconnect from WalkAbout™ or other display
- Submersible, waterproof and oil resistant
- All non-conductive fiberglass construction, unless otherwise noted
- Rugged easy to use locking collar between all sections
- All have 10 foot coil cords (2 foot coiled), except Baton, which has a 5 foot coil cord (1 foot coiled)


NAME DESCRIPTION	MODEL NO.	KEY FEATURES	EXTENDED REACH	COLLAPSED & FOLDED LENGTH ²	WEIGHT	ACCOMODATING CASES
2-Foot Baton	B-FNS	Maximum maneuverability; ideally suited for confined spaces / one-hand operation	2 ft 1 in (.64M)	1 ft 3 in (.38M)	1.4 lbs (.6 kg)	All
5-Foot Wand	W-FNS	Single-hand operation with good reach, non telescoping	5 ft 2 in (1.57M)	4 ft (1.22M)	2.5 lbs (1.1 kg)	A, T, V, S9
5-Foot Telescoping Pole	T-FNS-5	Single-hand operation with good reach, 2 section, designed for the N-CASE	5 ft 6 in (1.68M)	3 ft (.91M)	3.4 lbs (1.5 kg)	N, S6 ¹
7-Foot Telescoping Pole	T-FNS-7	Good extended reach, 4 section, designed for the back pack (B-CASE) for easy transportation	6 ft 11 in (2.10M)	2 ft 6 in (.76M)	3.6 lbs (1.6 kg)	B
9-Foot Telescoping Pole	T-FNS-9	Very portable with good reach, 4 section, designed for the N-CASE	9 ft 2 in (2.78M)	3 ft (.91M)	4.2 lbs (1.9 kg)	N, S6 ¹
11-Foot Telescoping Pole	T-FNS-11	Lighter and smaller than T-FNS-14, 3 section, yet still has very good extended length	10 ft 11 in (3.33M)	4 ft (1.22M)	4.1 lbs (1.9M)	A, T, V, S9
13-Foot Telescoping Pole	T-FNS-13	Increased reach, 4 section, designed for the N-CASE	12 ft 10 in (3.91M)	3 ft (.91M)	4.9 lbs (2.2 kg)	N, S6 ¹
14-Foot Telescoping Pole	T-FNS-14	Increased reach, 4 section, designed for the A-CASE	13 ft 11 in (4.24M)	4 ft (1.22M)	5.3 lbs (2.4 kg)	A, T, V, S9
18-Foot Telescoping Pole	T-FNS-18	Maximum reach, 4 section, all fiberglass construction	17 ft 11 in (5.46M)	5 ft (1.52M)	8.9 lbs (4.0 kg)	S20 (included)
20-Foot Telescoping Pole	T-FNS-20	Maximum reach, 4 section, fiberglass outer section, aluminum inner sections	20 ft (6.10M)	5 ft 6 in (1.68M)	10.2 lbs (4.6 kg)	S20 (included)
Rigid Wand	RW	Pole without gooseneck, 2 section, for use with UVIT	6 ft 10 in (2.08M)	4 ft (1.22M)	2.4 lbs (1.1 g)	A, T, V, S9
Rigid Wand	RW-8	Pole without gooseneck, 3 section, for use with UVIT	7 ft 6 in (2.34M)	3 ft (.91M)	3.4 lbs (1.5M)	N, S6 ¹
Under Vehicle Inspection Trolley	UVIT-BASE	Allows undercarriage inspection without the need to bend down	--	--	4.4 lbs (2.0 kg)	V, U

Note 1: Also fits in any A, V, t or S9 case
 Note 2: Add 10 inches for length when not folded.




PORTABLE
VIDEO
SYSTEMS


EXTENSION POLES

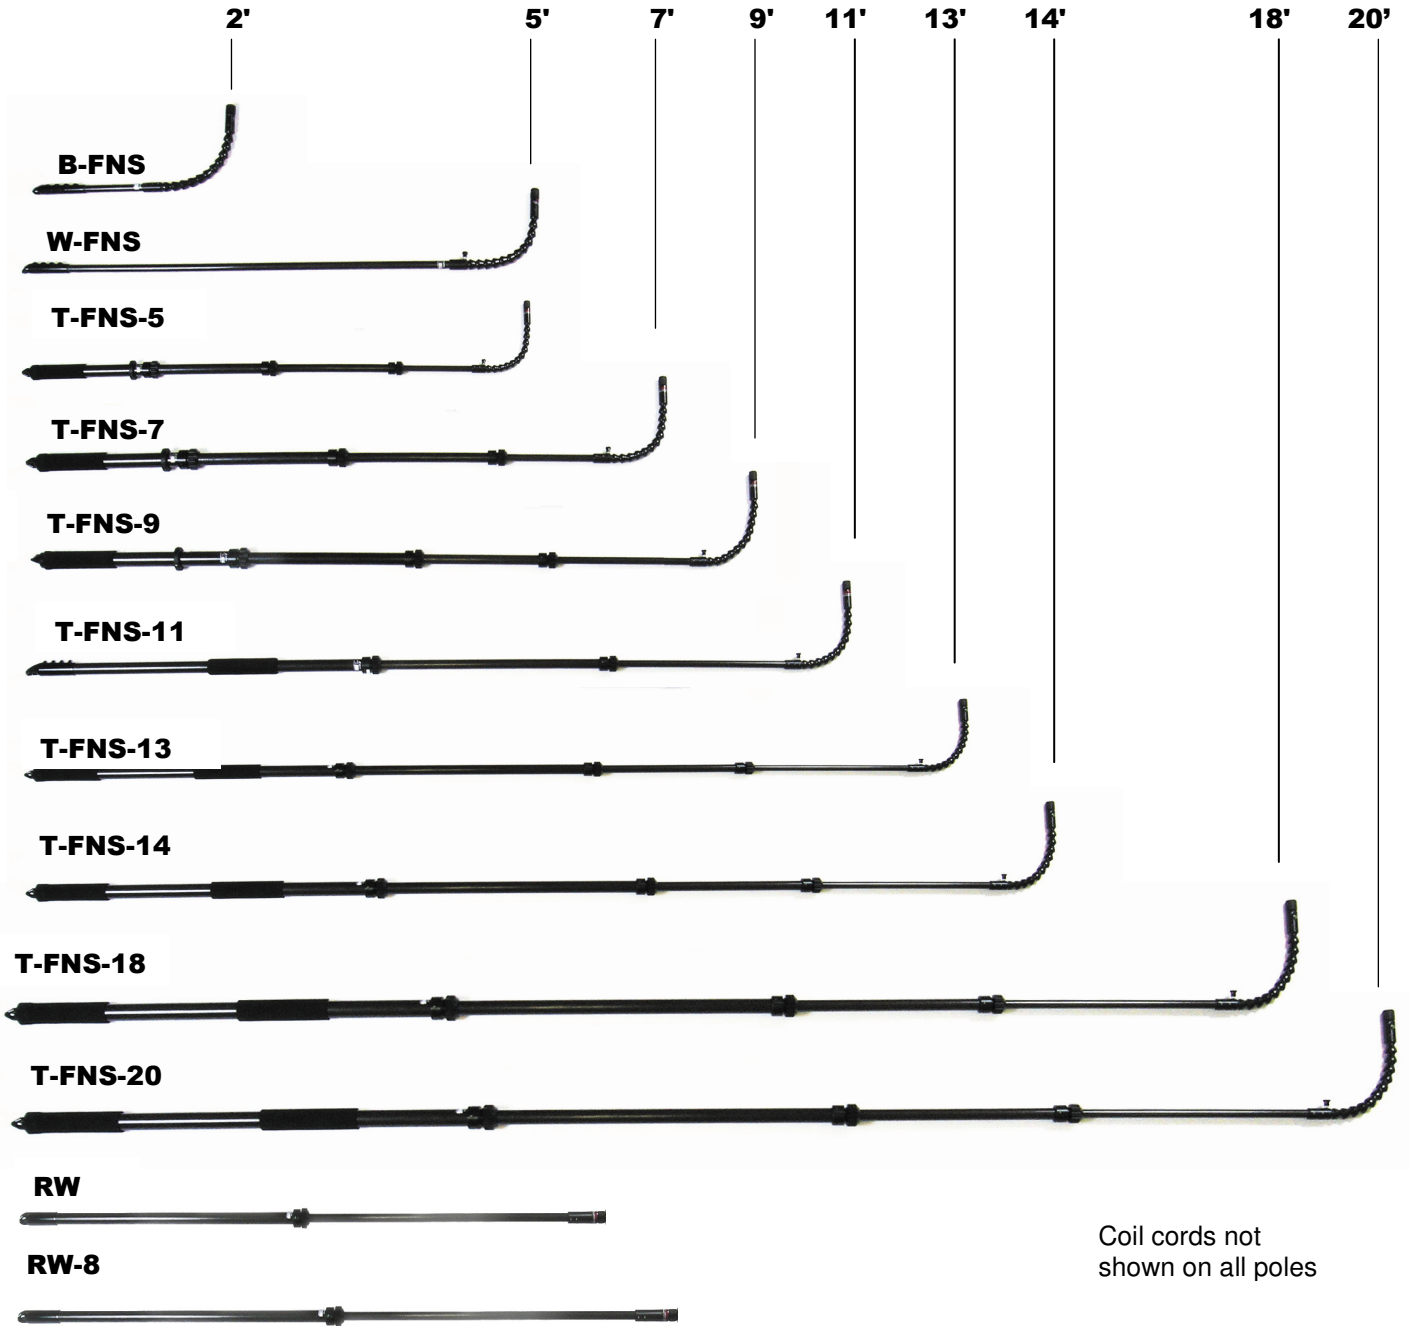

Coil cords not shown on all poles

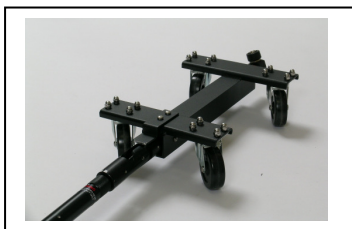

UVIT-BASE

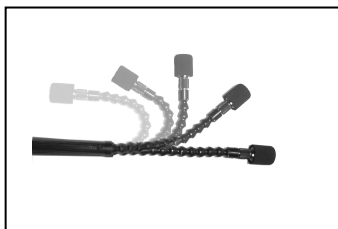

FLEXIBLE END



LOCKING COLLARS

May 2009